

DOSIMETRY EQUIPMENT

All-inclusive dosimetry lab solution


LANDAUER® offers you a complete dosimetry system. It covers all manufacturing and processing for dosimeters with a wide range of equipment such as: badges, readers, annealers, software...

Laboratory equipment

InLight dosimeter



Dosimeter readers

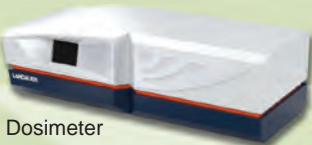

IRAS software



IMLS software



Equipment adapted to your environment and your needs

LANDAUER equipment is used for a large number of applications:

- Occupational dosimetry
- Area monitoring
- Environmental monitoring
- On-site analysis
- Emergency response monitoring.

InLight dosimeters monitor X, gamma, beta and neutron radiations and together with OSLR reader reports $H_p(10)$, $H_p(0,07)$ and $H^*(10)$ dose.

Our equipment can be adapted for any size organisation, be in a nuclear power station, a laboratory or a hospital.

Our aim – Our equipment can be adapted for any organisation size, being a nuclear power station, a laboratory or a hospital.


No one knows more about dosimetry equipment than LANDAUER

Because we use it for our own dosimetry program and provide dosimetry services to about 2 million individuals globally, we understand your need better than any other manufacturer.

More than 200 dosimetry laboratories in 60 countries operating with LANDAUER technology

Establishment of LANDAUER laboratories in the world

- Countries with LANDAUER offices
- Countries with laboratories equipped with LANDAUER OSL technology

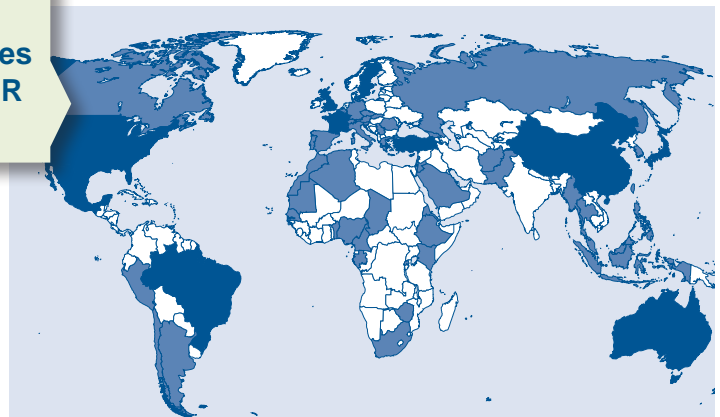

OSL TECHNOLOGY

Based on $Al_2O_3:C$, Optically Stimulated Luminescence (OSL), our technology is used exclusively worldwide for radiation monitoring. The detectors material is manufactured by LANDAUER according to the highest standard specifications. The technology benefits 30 years of regular improvement. OSL features and benefits are:

- **Fully optical, no heating:** the readout process uses a light-emitting diode (LED) to stimulate the detectors and the light emitted by the OSL material is detected and measured by a photomultiplier tube using a high-sensitivity photon counting system. The amount of light released during optical stimulation is directly proportional to the radiation dose and the intensity of stimulation light.
- **Dose algorithms meet several accreditation bodies requirement:** US National Voluntary Laboratory Accreditation Program, and Department of Energy Laboratory accreditation Program accreditation requirements...
- **High sensitivity minimizing the stimulation:** the optical stimulation keeps more than 99 % of the information. The non destructive readout process of OSL $Al_2O_3:C$ detector enables dosimeters to be archived and allows multiple reading in case of dose investigation. The detectors can be reused for several years.
- **Stable sensitivity over time:** OSL dosimeters sensitivity is defined forever. The stability of the material under any environment condition makes this sensitivity unchanged during all dosimeter's life.
- **No calibration is required:** the sensitivity of InLight is determined during the manufacturing process by an ISO/IEC 17025 accredited laboratory. The sensitivity value engraved on the detector is automatically considered during the reading process.
- **No fading:** InLight dosimeters make extended wear period possible as well as dosimeters archived reread without corrections for fade.

COMPLIANCE WITH STANDARDS

IEC 62387-1:2012 - Passive integrating dosimetry systems for personal and environmental monitoring of photons and beta radiation - Radiation protection instrumentation.

Characterisation of dosimeters carried out by an independent referenced laboratory : The French National Laboratory Henri Becquerel (LNHB) - CEA.

A large amount of laboratories worldwide using Landauer dosimetry equipment are approved according to ISO/IEC 17025.


SIMPLIFIED ACCREDITATION PROCESS

The system is scalable, and can be configured to complement your current dosimetry program, or can enable you to maintain your own in-house accredited dosimetry program.

With our solution and our support, you will get easily and quickly ISO/IEC 17025 accreditation.

LABORATORY EQUIPMENT "À LA CARTE"

LANDAUER offers you a wide range of options to design a dosimetry program customised to your requirements. For example, your organisation can either choose to process its own dosimeters, or entrusts all or part of the dosimetry process to LANDAUER such as extremity, lens of eye or neutron dosimetry services.

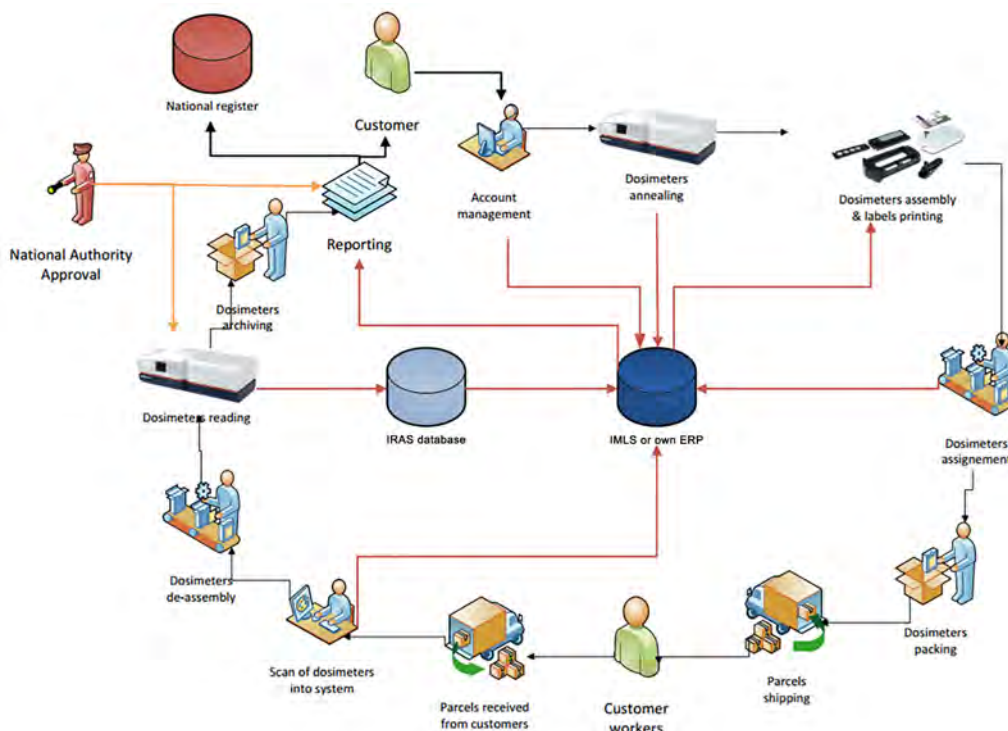

OSLR READERS

OSLR readers are designed for use with InLight dosimeters for whole body, environmental and emergency response monitoring.

All-in-one dosimeter reader

The OSLR reader works with the LANDAUER complete dosimetry system, a solution for onsite dosimetry using LANDAUER OSL technology. OSLR performs both reading and annealing process with very high throughput

Quality, simply and with reliability

LANDAUER OSLR reader includes an external PC with menu-driven IRAS software. The software automatically captures bar-coded dosimeter serial numbers, which facilitates chain of custody. The reader and the software provide control over reader setup, analysis, database maintenance.

Quality Control (QC) procedures and data recording, enabling dosimeter readout, recording and the monitoring of reader performance - and providing you rapid, accurate radiation assessment that can help improve the efficiency and productivity of your program.

High quality components are used for durability and to insure repetitive and long term performances. All important components are automatically and periodically checked with built in QC procedures.

Traditional technics with internal radioactive source or external irradiator are no longer required. OSLR reader uses QC delivered samples, internal LED and photodiode to perform all QC tests

Scalability

Three OLSR readers are proposed to adapt to the number of workers being monitored in your lab. Upgrading loader capacity during product life time is designed to be simple. For small laboratory, the manual reader microStar is also proposed


OTHER FEATURES AND BENEFITS:

- No heating parameters to control
- No gas supply
- Fast reader throughput
- Simple calibration process
- Remote diagnostic and maintenance
- Dose assessment algorithm embedded
- Welmec compliant
- Compatible with Windows 10

OSLR50 Automatic Reader



OSLR250 Automatic Reader

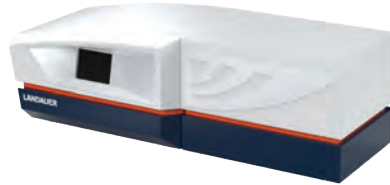

OSLR700 Automatic Reader



Desk-top model	Desk-top model	Desk-top model
300 dosimeters / hour	300 dosimeters / hour	300 dosimeters / hour
1 magazine / 50 dosimeters	Up to 5 magazines / 250 dosimeters	Up to 14 magazines / 700 dosimeters
1011x452x352 mm / 39.8x17.8x13.9 inch	1100x452x352 mm / 43.3x17.8x13.9 inch	1186x452x352 mm / 46.7x17.8x13.9 inch
50 kg / 110 lb	73 kg / 162 lb	85 kg / 187 lb
100 - 240 V - 1,5 A / 50 - 60 Hz	100 - 240 V - 1,5 A / 50 - 60 Hz	100 - 240 V - 1,5 A / 50 - 60 Hz
Operating Temperatures: +10 °C to +35 °C		
Storage temperature: -10°C à + 60 °C, 30-70% N.C.		
Protection index: IP40		

SOFTWARE AND ACCESSORIES

In addition to OSLR readers and annealers, LANDAUER provides software, accessories and support for organisations that require to operate their own in-house service or for other applications:

- IMLS software (Individual Monitoring Lab Software)
- Manual and automatic pin cutters
- Barcode readers
- Training and support

INLIGHT DOSIMETER

InLight dosimeters are used for occupational, area/environmental, and emergency response monitoring, in any kind of facilities.

- **Robust, compact and lightweight dosimeter**
- **Fully personalised and customizable**
- **A new detection system**
The dosimeter InLight is based on a new detector and a new generation of dose equivalent estimation algorithm. With InLight, you get a more accurate estimation of the dose equivalent at very low doses.
- **Higher performances**
InLight complies with all of the IEC 62387-1: 2012 standard. Its characterisation by an independent laboratory (LNHB) shows metrological performances higher than the standard requirements.



General characteristics

Manufacturer	LANDAUER
Radiation measured	Photons (X- and gamma rays) and beta
Detector	New detector, GA or GN type
Materials	Aluminium oxide, doped with carbon, Al ₂ O ₃ :C
Filters	Open window, aluminium, titanium, tin
Dimensions without clip	35 mm x 74 mm x 10 mm
Weight	17 g
Dosimeter identification	1D / 2D barcode
Operational dose quantities	H _p (10), H _p (0.07), H'(10)



- Detector filters
- Open window
 - Aluminium
 - Titanium
 - Tin



Specifications

Type of measured radiation	Result of the InLight dosimeter	
	Photons	Beta
Personal dose equivalent	H _p (10) and H _p (0.07)	H _p (0.07)
Dose range	0.05 mSv to 10 Sv	
Linearity response	0.05 mSv to 10 Sv - Standard deviation < 5 %	
Measurement reproducibility	< 5 %	
Energy response (mean energy)	16 keV to 6 MeV (E _{max} = 18 MeV)	250 keV to 1 MeV (E _{max} = 2.2 MeV)
Energy dependency	Weak, < 11 % from 16 keV at 6 MeV	
Angular response (horizontal and vertical angles)	± 60° from 16 keV	± 45° from 250 keV
Angular dependency	Excellent - Average deviation < 6 %*	
Fading	< 1.5 % / month	
Neutrons detection	Insensitive to neutrons	

* Average gap beside the true response

Environmental resistance characteristics

Operating and storage temperature	-10 °C to 40 °C
Humidity	0 % à 90 %
Light exposure	Tested up to 1,000 W/m ² - Compliant with the standard requirements.